


OPAL ELEGANCE - FLUSH SASH WINDOWS



SUITABLE FOR
RESIDENTIAL,
COMMERCIAL &
RETAIL PROPERTIES




74.5_{MM}
TYPICAL SIGHTLINE


A

WINDOW
ENERGY RATING

U-VALUE **1.3** W/M²K
USING 0.7 CENTRE PANE.
(1.5 USING 1.0 CENTRE PANE)



SIDE HUNG
MAX WIDTH
700_{MM}

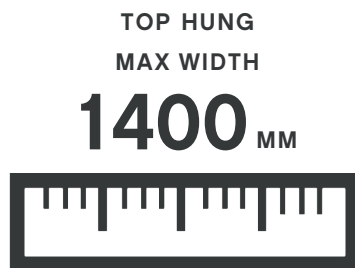

TOP HUNG MAX
HEIGHT

1300_{MM}

SIDE HUNG
MAX HEIGHT

1400_{MM}



24 OR 28MM
DOUBLE OR TRIPLE
GLAZED UNITS.

ALL PROFILES FEATURE
POLYAMIDE BREAK THAT
ENHANCES THERMAL
PROPERTIES



70_{MM}
FRAME
DEPTH

AIR
600_{PA}

WIND
2000_{PA}

WATER
1050_{PA}

PAS
24:2016

DOC. L
COMPLIANT

OPAL ELEGANCE - FLUSH SASH WINDOWS

OPAL
ALUMINIUM WINDOWS AND DOORS